



**Typical Specifications For
Modulating MicoFlame – Domestic Hot Water Supply
Models MF(N),(P)H 60 – 300, Non-Condensing
Models MF(N),(P)H 62 – 302, Condensing**

The water heater shall be a CAMUS MicoFlame model _____ having an input rating of _____ Btu (kw) /hr. and _____ Btu (kw)/hr output for domestic hot water and shall be operated on Natural gas or L.P. gas. The water heater shall be capable of firing down to 35% of rated input.

The water heater shall be design/certified by CSA International and shall meet the requirements of ANSI Z21.10.3b-2008 & CSA 4.3b-2008. The water heater shall be optionally vented as a Category I conventional appliance or a category II condensing appliance.

Combustion Chamber:

The combustion chamber shall be fully enclosed by high temperature fiberboard refractory, which is of modular interlocking construction for ease of replacement.

Burner:

The burner shall be constructed of high heat temperature Stainless Steel with knitted metal fiber to provide modulating firing rates. The burner shall provide equal distribution of heat through the entire heat exchanger. A window view port shall be provided for visual inspection of the water heater during firing.

Heat Exchanger:

The heat exchanger shall be suitable for a M.A.W.P. of 160 psig (1100 kPa) and shall be of a two pass design employing integrally finned 7/8" copper tubes. All castings shall be bronze. A pressure relief valve of _____ lb/hr shall be furnished with the heater. There shall be ready access to the heat exchanger to permit internal and external inspection and cleaning of the tubes.

Controls:

Standard controls to include factory mounted hi-limit and operator controls, on/off switch and 24 VAC class 2 transformer and light display package. The SmartFlame 78-0017 electronic modulating control to be accurate to 1°F (0.5°C). The control shall also provide readouts of inlet/outlet temperatures and delta T as well as accumulated run hours. The control shall have 8 preset modes to allow operation of the heater as hydronic heating, DHW or remote operation through analog 0-10VDC signal.

On/off switch and full diagnostic light package are included. Flow switch is included loose.

Firing Mode:

The heater shall operate as a fully modulating unit with a 3 to 1 turn down ratio.

Gas Train:

The gas train shall consist of a one to one air/gas ratio control valve with venture, dual main valve seats, a pilot valve and pilot regulator.

Ignition Module:

The ignition module shall provide for proved ignition of intermittent pilot and continuous retrieval. Trial for ignition shall be a minimum of 15 seconds with 5 minutes between retrievals.


External Jacket and Fasteners:

The external jacket shall be of stainless and enameled steel panels assembled with crimplite non-strip self tap screws.

SUBMITTAL DATA SHEET – MICROFLAME

Engineer: _____ Job Location: _____ Date: _____
 Prepared by: _____ Buyer's Name: _____ Quote #: _____
 Job Name: _____ Buyer's Address: _____

Model 60 – 300 Non-Condensing, 62-302 Condensing

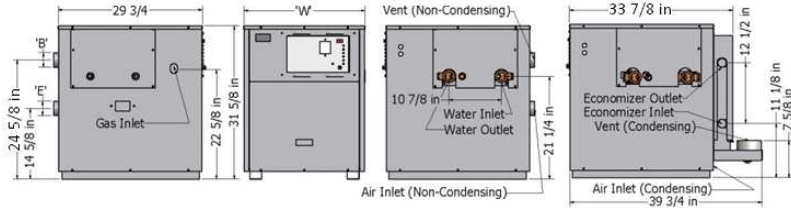

Side View (Left) Front View Side View (Right) Side View (Right) Condensing

Input & Output Range

Model	Input Range [kBTU/hr x 100]	Input Range [kW]	Non-Condensing		Condensing	
			Output [BTU/hr]	Output [kW]	Output [BTU/hr]	Output [kW]
60/62	21 - 60	6.1 - 17.6	51,000	14.9	57,000	16.7
100/102	35 - 100	10.2 - 29.3	85,000	24.9	95,000	27.8
150/152	53 - 150	15.5 - 43.9	127,000	37.2	142,500	41.7
200/202	70 - 199	20.5 - 58.2	170,000	49.8	190,000	55.6
250/252	88 - 250	25.8 - 73.2	212,500	62.2	237,500	69.5
300/302	105 - 299	30.7 - 87.5	255,000	74.7	285,000	83.5

Dimensions & Specifications

Model	'W'	Water Connection	Gas Connection	Approx. Weight	
				Non-Condensing [lbs.]	Condensing [lbs.]
60/62	18 3/4	1 1/2	1/2	190	230
100/102	18 3/4	1 1/2	1/2	195	235
150/152	18 3/4	1 1/2	1/2	200	240
200/202	18 3/4	1 1/2	1/2	210	250
250/252	25	1 1/2	3/4	225	285
300/302	25	1 1/2	3/4	240	290

Heat Exchanger Head Loss & Flow

Model	20°F		30°F		35°F	
	USGPM	ΔP-ft.	USGPM	ΔP-ft.	USGPM	ΔP-ft.
60/62	10.2	0.03	5.1	0.01	3.4	0.005
100/102	17.0	0.07	8.5	0.02	5.7	0.010
150/152	25.5	0.20	12.8	0.04	8.5	0.030
200/202	34.0	0.40	17.0	0.08	11.3	0.050
250/252	42.5	0.65	21.3	0.16	14.2	0.100
300/302	51.0	1.50	25.5	0.49	17.0	0.190

Venting

Model	Outdoor	'B' Dia. Venting**			'E' Dia.
		Sidewall or Condensing*	Standard	Standard	Air Inlet*
60/62	3	3	3	3	
100/102	3	3	4	3	
150/152	3	3	4	3	
200/202	4	4	5	4	
250/252	4	4	5	4	
300/302	5	5	6	5	

*50 Ft. Equivalent

**Non-Condensing models are shipped with standard vent opening size unless sidewall vent is specified

Recovery Capacity

Model	100°F Rise	56°C Rise	80°F Rise	44°C Rise	60°F Rise	33°C Rise	50°F Rise	28°C Rise	40°F Rise	22°C Rise	20°F Rise	11°C Rise
	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH
60/62	61.2	231.6	76.5	289.6	102.0	386.1	122.4	463.3	153.0	579.2	306.0	1158.3
100/102	101.9	385.7	127.4	482.2	169.8	642.9	203.8	771.5	254.8	964.3	509.5	1928.7
150/152	152.9	578.8	191.1	723.5	254.8	964.6	305.8	1157.6	382.3	1447.0	764.5	2893.9
200/202	203.8	771.5	254.8	964.3	339.7	1285.8	407.6	1542.9	509.5	1928.7	1019.0	3857.3
250/252	254.8	964.5	318.5	1205.7	424.7	1607.5	509.6	1929.0	637.0	2411.3	1274.0	4822.6
300/302	305.7	1157.2	382.1	1446.5	509.6	1928.7	611.4	2314.4	764.3	2893.0	1528.5	5786.0

Model # _____ # Of Units _____ Type of Gas _____

Total Input _____ BTU/hr Flow _____ USGPM @ Allowable Pressure Drop _____ ft.
 Total Output _____ BTU/hr Recovery Rate _____ USGPH @ _____ °F

Optional Accessories _____